

DS-PDC10DM-VG3

Wired Dual-Tech AM Curtain Detector

- · Slim design for window frame installation
- · IP65 weather resistance for outdoor application
- · Active IR anti-masking
- · Automatic sensitivity
- · Selectable EOL resistors for alarm and tamper-proof wiring
- · Directional detection support



▪ Specification


| Model | | DS-PDC10DM-VG3 |
|----------------------------|----------------------------------|---|
| Detection Performance | Detection Method | Passive Infrared, Microwave |
| | Detection Range | Wall Mount: 10m Ceiling Mount: 6m |
| | Detection Angle | 5° |
| | Detection Zones | 32 |
| | Detectable Speed | 0.2~3m/s |
| | Sensitivity | Auto |
| | White Light Filter | 6500lux |
| | Microwave Frequency | 24GHz(24.15~24.25GHz) |
| | Digital Temperature Compensation | Support |
| | Creep Zone Protection | Support |
| | Anti-masking | Support |
| Feature | Digital Processing | Support |
| | Sealed Optics | Support |
| | Tamper Protection | Front, Rear |
| | Directional Detection | Support |
| Interface | Alarm Output | Normally Closed |
| | LED Indicator | Green(PIR), Red(Microwave), Green+Orange(Mask), Blue(Alarm) |
| Transmission | Transmission Method | Wired |
| Electrical Characteristics | Power Consumption | 22mA Max |
| | Power Supply | 9 to 16 VDC |
| | Typical Voltage | 12 VDC |
| General | Operation Temperature | -25 °C to 60 °C (-13 °F to 140 °F) |
| | Storage Temperature | -25 °C to 60 °C (-13 °F to 140 °F) |

| | |
|----------------------|---------------------------|
| Operation Humidity | 10% to 90% |
| IP Rate | IP65 |
| Dimension(WxHxD) | 29.2mm × 134.4mm × 39.5mm |
| Weight | 79g |
| Mounting Height | 2 to 4m |
| Mounting Method | Wall,Ceiling |
| Application Scenario | Indoor,Outdoor |
| Bracket | L-shaped adapter included |

▪ **Available Model**

DS-PDC10DM-VG3

▪ **Installation**

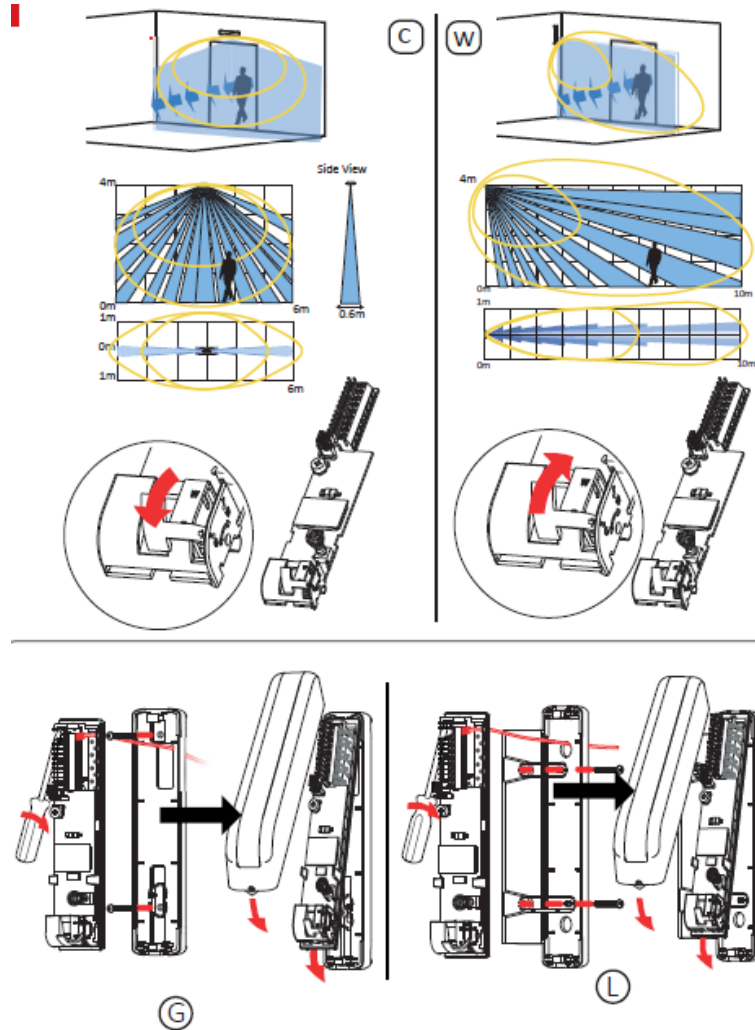

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com