
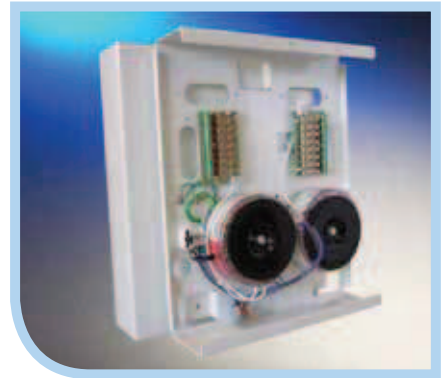


	Intruder	Access Control	CCTV	Fire	General
Vision Range			●		

Overview

The Vision range has been specifically designed for CCTV applications and feature 24V ac and dc models.

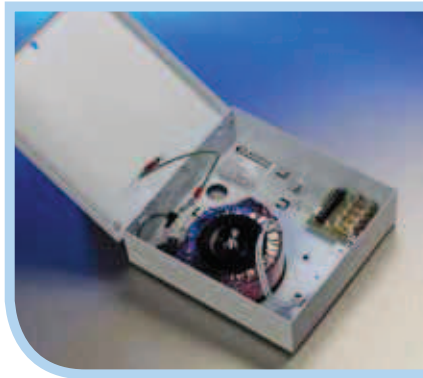

Description

Features

- 24V ac (VR) and 24V dc (VRS) nominal output
- Available in boxed and encapsulated models
- Neat, compact designs
- IP66 models available (P/4P models)
- VRS models - Switch mode design
- Screen printing available
- 3 year warranty

AC Models:

Part Number	Amp Rating	Box Size	Fused Outputs
VR24500EB	0.5	Encapsulated	N/A
VR241000EB	1.0		
VR2420	2.0	L	1 x 2A
VR2420-4			4 x 0.5A
VR2440	4.0	J	1 x 4A
VR2440-4			4 x 1A
VR2440-8			8 x 0.5A
VR2460-4	6.0	M (IP66)	4 x 1.5A
VR2420-2P	2.0		2 x 1A
VR2440-P	4.0		1 x 4A
VR2440-4P		4 x 1A	
VR2460-4P	6.0		4 x 1.5A
VR2480-T	8.0	T	1 x 8A
VR2480-2-T			2 x 4A
VR2480-4-T			4 x 2A
VR2480-8-T			8 x 1A
VR2480-4P		Q (IP66)	4 x 2A
VR2416000-8-S	16.0	S	8 x 2A
VR2416000-16-S			16 x 1A

DC Models:

Part Number	Amp Rating	Box Size	Fused Outputs
VRS242000-J	2A	J	1 x 2A
VRS242000-2-J			2 x 1A
VRS242000-4-J			4 x 0.5A
VRS242000-8-J			8 x 0.25A
VRS242000-2P		P (IP68)	2 x 1A
VRS244000-4-T	4A	T	4 x 1A

