

DH-IPC-HFW5241E-Z5E

2MP IR Vari-focal Bullet WizMind Network Camera



Launched by Dahua Technology, Dahua WizMind is a full portfolio of solutions composed of project-oriented products including IPC, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customer's requirements, WizMind provides precise, reliable and comprehensive AI solutions for verticals.

Series Overview

With starlight solution and deep learning algorithm, Dahua WizMind 5 Series network camera has various intelligent functions, including face capture, perimeter protection and people counting, which greatly improve the accuracy of video analysis.

Functions

Face Detection

Dahua Face Detection technology can detect the face in the image. With deep learning algorithm, the technology supports detecting, tracking, capturing and selecting the best face image, and then outputs face snapshot.

Face Attributes

With deep learning algorithm, the network camera can recognize face attributes, such as gender, age, expression, glasses, mouth mask, and beard.

Perimeter Protection

With deep learning algorithm, Dahua Perimeter Protection technology can recognize human and vehicle accurately. In restricted area (such as pedestrian area and vehicle area), the false alarms of intelligent detection based on target type (such as tripwire, intrusion, fast moving, parking detection, loitering detection and gathering detection) are largely reduced.

People Counting

With deep learning algorithm, Dahua People Counting technology can track and process moving human body targets to realize the accurate statistics of enter No., leave No., and In Area No. Working with management platform, it outputs yearly/monthly/daily reports to meet your requirements.

- 2-MP 1/2.8" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 2 MP (1920 × 1080)@30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in IR LED, and the max. illumination distance is 120 m.
- ROI, SVC, SMART H.264+/H.265+, AI H.264/H.265, encoding after filter, flexible coding, applicable to various bandwidth and storage environments.
- Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- Three switchable intelligent resources: IVS, face detection, and people counting.
- Alarm: 2 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card.
- 12 VDC/PoE power supply, easy for installation.
- IP67 and IK10 protection; ePoE.
- SMD3.0.



ePoE

Dahua's innovative ePoE technology offers a new solution to transmit power and data over long distances between cameras and network switch, allowing more flexible design of surveillance system, improving reliability, reducing installation time and saving money. ePoE technology encompasses pure network systems where a single CAT6 cable can carry signals up to 300 m (984 ft) at 100 Mbps, 800 m (2625 ft) at 10 Mbps.

Cyber Security

Dahua network cameras employ a series of security technologies, including security authentication and authorization, access control protocols, trusted protection, encrypted transmission and encrypted storage. These technologies improve the camera's defense against external cyber threats and prevent malicious programs from compromising the device.

Protection (IP67, IK10, wide voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normal after soaking in 1 m deep water for 30 minutes.

IK10: The enclosure can stand the punch more than 5 times from a 5 kg hammer falling from a height of 40 cm (Impact energy is 20J).

Wide voltage: The camera allows $\pm 30\%$ (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification

Camera

| | |
|----------------------------|--------------------------------------------------------------------------------------------|
| Image Sensor | 1/2.8" CMOS |
| Max. Resolution | 1920 (H) × 1080 (V) |
| ROM | 128 MB |
| RAM | 512 MB |
| Scanning System | Progressive |
| Electronic Shutter Speed | Auto/Manual 1/3 s–1/100,000 s |
| Min. Illumination | 0.0015 lux@F1.3 (Color, 30 IRE) 0.0002 lux@F1.3 (B/W, 30 IRE) 0 lux (Illuminator on) |
| S/N Ratio | >56 dB |
| Illumination Distance | 120 m (393.70 ft) (IR) |
| Illuminator On/Off Control | Auto |
| Illuminator Number | 4 (IR LED) |
| Pan/Tilt/Rotation Range | Pan: 0°–360° Tilt: 0°–90° Rotation: 0°–360° |

Lens

| | | | | | |
|----------------------|--------------------------------------------------------------|--------------------------|------------------------|-----------------------|-----------------------|
| Lens Type | Motorized vari-focal | | | | |
| Lens Mount | Module | | | | |
| Focal Length | 7 mm–35 mm | | | | |
| Max. Aperture | F1.3 (Constant) | | | | |
| Field of View | Horizontal: 33°–10° Vertical: 19°–5° Diagonal: 38°–11° | | | | |
| Iris Control | Auto | | | | |
| Close Focus Distance | W–T: 0.3 m–2 m (0.98 ft–6.56 ft) | | | | |
| DORI Distance | Lens | Detect | Observe | Recognize | Identify |
| | W | 131.0 m (429.79 ft) | 52.4 m (171.91 ft) | 26.2 m (85.96 ft) | 13.1 m (42.98 ft) |
| | T | 427.6 m (1,402.89 ft) | 171.0 m (561.02 ft) | 85.5 m (280.51 ft) | 42.7 m (140.09 ft) |

Smart Event

| | |
|----------|----------------------------------|
| IVS | Abandoned object; missing object |
| Heat Map | Yes |

Professional, intelligent

| | |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IVS (Perimeter Protection) | Intrusion, tripwire, fast moving (the three functions support the classification and accurate detection of vehicle and human); loitering detection, people gathering, and parking detection |
| SMD 3.0 | Less false alarm, longer detection distance |
| Face Detection | Face detection; track; snapshot; snapshot optimization; optimal face snapshot upload; face enhancement; face exposure; face attributes extraction including 6 attributes (gender, age, glasses, expressions, mask, and beard) and 8 expressions (angry, sad, disgusted, scared, surprised, calm, happy, confused); face snapshot set as face or one-inch photo; snapshot strategies (real-time snapshot, quality priority and optimization snapshot); face angle filter; optimization time setting |

People Counting

Support the counting of enter number, leave number and pass number, and displaying and outputting yearly/monthly/daily reports.
Support the counting of number in area, and 4 rules configuration. Count number of people or stay time and link alarm.
Support queue management, and 4 rules configuration. Count number of people or stay time and link alarm.

Smart Search

Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos

Video

Video Compression

H.265; H.264; H.264H; H.264B; MJPEG (Only supported by the sub stream)

Smart Codec

Smart H.265+; Smart H.264+

AI Coding

AI H.265; AI H.264

Video Frame Rate

Main stream: 1920 × 1080@(1 fps–25/30 fps)
Sub stream: D1@(1 fps–25/30 fps)
Third stream: 1080p@(1 fps–25/30 fps)
*The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.

Stream Capability

3 streams

Resolution

1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)

Bit Rate Control

CBR/VBR

Video Bit Rate

H.264: 32 kbps–8192 kbps
H.265: 32 kbps–8192 kbps

Day/Night

Auto(ICR)/Color/B/W

BLC

Yes

HLC

Yes

WDR

120 dB

Scene Self-adaptation (SSA)

Yes

White Balance

Auto; natural; street lamp; outdoor; manual; regional custom

Gain Control

Auto; manual

Noise Reduction

3D NR

Motion Detection

OFF/ON (4 areas, rectangular)

Region of Interest (RoI)

Yes (4 areas)

Image Stabilization

Electronic Image Stabilization (EIS)

Smart Illumination

Yes

Defog

Yes

Image Rotation

0°/90°/180°/270°

Mirror

Yes

Privacy Masking

8 areas

Audio

Audio Compression

PCM; G.711a; G.711Mu; G.726; G.723

Alarm

| | |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarm Event | No SD card; SD card full; SD card error; network disconnection; IP conflict; illegal access; motion detection; video tampering; defocus detection; tripwire; intrusion; fast moving; abandoned object; missing object; loitering detection; people gathering; parking detection; scene changing; input error; voltage detection; face detection; people counting in area; stay detection; people counting; people number error detection; queue management; intensity change |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Network

| | |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network Port | RJ-45 (10/100 Enhancement Base-T) |
| SDK and API | Yes |
| Cyber Security | Video encryption; firmware encryption; configuration encryption; Digest; WSSE; account lockout; security logs; IP/MAC filtering; generation and importing of X.509 certification; syslog; HTTPS; 802.1x; trusted boot; trusted execution; trusted upgrade |
| Network Protocol | IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; SNMP; Bonjour |
| Interoperability | ONVIF (Profile S/Profile G/Profile T); CGI; P2P; Milestone |
| User/Host | 20 (Total bandwidth: 80 M) |
| Storage | FTP; SFTP; Micro SD card (support max. 256 GB); NAS |
| Browser | IE: IE8 and later Chrome Firefox |
| Management Software | Smart PSS, DSS, DMSS |
| Mobile Client | iOS; Android |

Certification

| | |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Certifications | CE-LVD: EN 62368-1 CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU FCC: 47 CFR FCC Part 15, Subpart B UL/CUL: UL60950-1 CAN/CSA C22.2 No.60950-1-07 |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Port

| | |
|--------------|------------------------------|
| Audio Input | 1 channel (RCA port) |
| Audio Output | 1 channel (RCA port) |
| Alarm Input | 2 channels in: 5 mA 3-5 VDC |
| Alarm Output | 1 channel out: 300 mA 12 VDC |

Power

| | |
|-------------------|---------------------------------------------------------------------------------------------------------|
| Power Supply | 12 VDC/PoE (802.3af)/ePoE |
| Power Consumption | Basic: 2.5 W (12 VDC); 3.2 W (PoE) Max. (max. stream + IR LED + focus): 9.4 W (12 VDC); 10.3 W (PoE) |

Environment

| | |
|-----------------------|--------------------------------------|
| Operating Temperature | -30 °C to +60 °C (-22 °F to +140 °F) |
| Operating Humidity | ≤95% |
| Storage Temperature | -40 °C to +60 °C (-40 °F to +140 °F) |
| Protection | IP67; IK10 |

Structure

| | |
|--------|-----------------|
| Casing | Metal + plastic |
|--------|-----------------|

| | |
|--------------------|---------------------------------------------------------------|
| Product Dimensions | 273.2 mm × 95 mm × 95 mm (10.76" × 3.74" × 3.74") (L × W × H) |
| Net Weight | 1110 g (2.45 lb) |
| Gross Weight | 1510 g (3.33 lb) |

Ordering Information

| Type | Model | Description |
|------------------------|----------------------|-------------------------------------------------------|
| 2MP Camera | DH-IPC-HFW5241EP-Z5E | 2MP IR Vari-focal Bullet WizMind Network Camera, PAL |
| | DH-IPC-HFW5241EN-Z5E | 2MP IR Vari-focal Bullet WizMind Network Camera, NTSC |
| Accessories (optional) | PFA152-E | Pole Mount Bracket |
| | PFA121 | Junction Box |
| | PFM321D | 12 VDC 1A Power Adapter |
| | PFM900-E | Integrated Mount Tester |
| | TF-P100/256G | MicroSD Memory Card |

Accessories

Optional:



PFA152-E Pole Mount Bracket



PFA121 Junction Box




PFM321D 12 VDC 1A Power Adapter



PFM900-E Integrated Mount Tester



TF-P100/256G MicroSD Memory Card

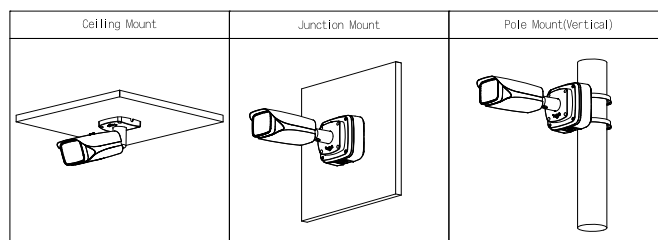

Dimensions (mm[inch])

