


CODE: **AWO363** v1.2/IV
 NAME: **LED/B-SIN**

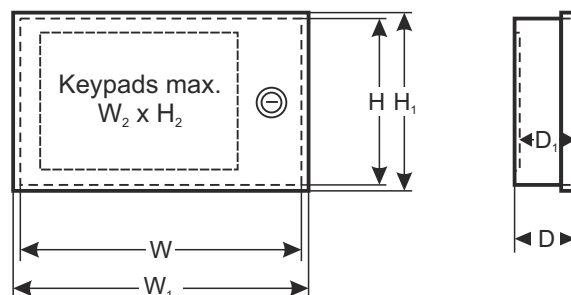

DESTINATION

INTERLOGIX

KEYPADS: CS 5186 (LED), CS 5500 (LCD), ATS 1110 (LCD)

SINTONY

KEYPADS: SAK 33, 34, 71, 72, 73, 74, 21

CADDX NETWORK

KEYPADS: NX-1508E, NX-1516E(LED Slimline)

GALAXY

KEYPADS: MK-7

PARADOX

KEYPADS: SPC-1686V, ESP- 646

TECHNICAL DATA

External dimensions of the enclosure: W=169, H=190, D=50 [+/- 2mm]

External dimensions of the front panel: W₁=177, H₁=195 [+/- 2mm]

Keyboard mounting dimensions: W₂=110, H₂=185, D₁=41 [+/- 2mm]

Weight net/gross: 0,85kg / 0,90kg [+/-0,1kg]

Operating environment: class II, -10°C+ 40°C

Material description: sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

Destination: indoor

Tamper protection: 1 x microswitch: opening, 0,5 A@50 V DC max. NC- contacts

Closing: lockable (various code, two keys included)

Notes: removable back mounting plate

Declaration, warranty: RoHS, 2 year from the production date